




ENGINEERED POWER LP

LIRDD-180HT

High Temperature Discharge (750mA)

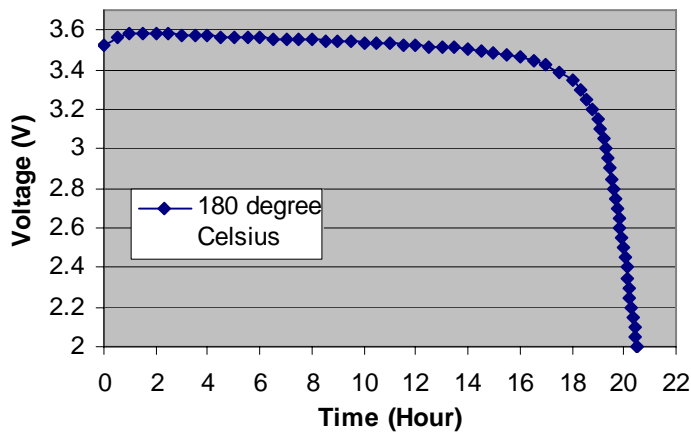

**Primary
High Energy
Extreme Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 15.0 Ah

Rated Current: 750 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +356°F (-40°C to +180°C)

Physical Dimensions: 5.00 inch (126.2 mm) x 1.25 inches (31.8 mm) diameter

Weight: 6.5 ounces (185 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling(LWD)
Oil Well Instrumentation.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#109, 1120 – 53rd Ave N.E.
Calgary, Alberta, T2E 6N9
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: May 2007