




ENGINEERED POWER LP

LIRDD-HTS-5811F

High Temperature Discharge
750mA, 150C

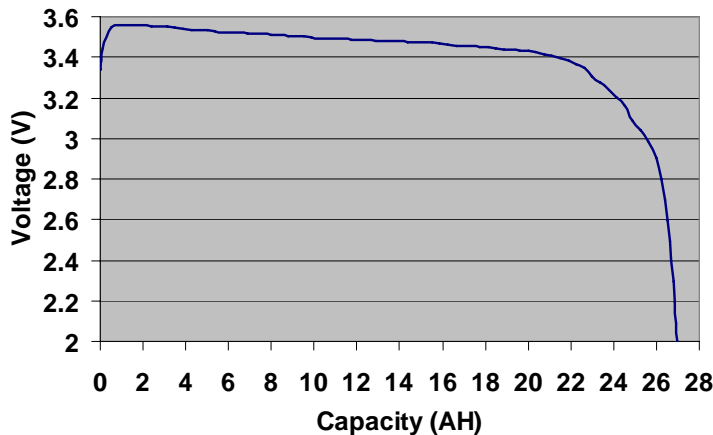

**Primary
High Energy
High Temperature
High Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 27.0 Ah

Rated Current: 750 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 5.00 inch (126.2 mm) x 1.25 inches (31.8 mm) diameter

Weight: 7.5 ounces (212 grams ±5 grams)

Suitable Applications: Transceivers, Sonobuoys, Memory Backup, Oil Well
Instrumentation, Measurement While Drilling (MWD), Logging
While Drilling (LWD), High Shock & Vibration Application.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#20, 3103 – 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: December 2009