




ENGINEERED POWER LP

LMRC-165HT

High Temperature Discharge
100mA, 165C

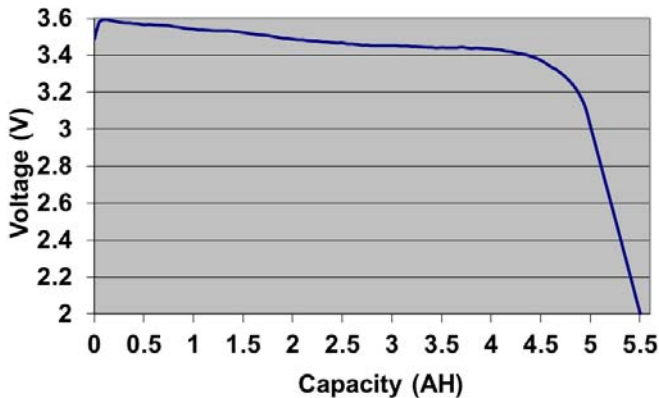

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 5.5 Ah

Rated Current: 100 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +329°F (-40°C to +165°C)

Physical Dimensions: 1.95 inch (49.5mm) x 0.98 inches (25.0mm) diameter

Weight: 1.9 ounces (54.0 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Down Hole & Pressure Gauge Applications, Memory Backup.

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#109, 1120 – 53rd Ave N.E.
Calgary, Alberta, T2E 6N9
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: May 2006