




**ENGINEERED POWER LP**

# LMRDD-DA-180HT

High Temperature Discharge  
400mA, 180C

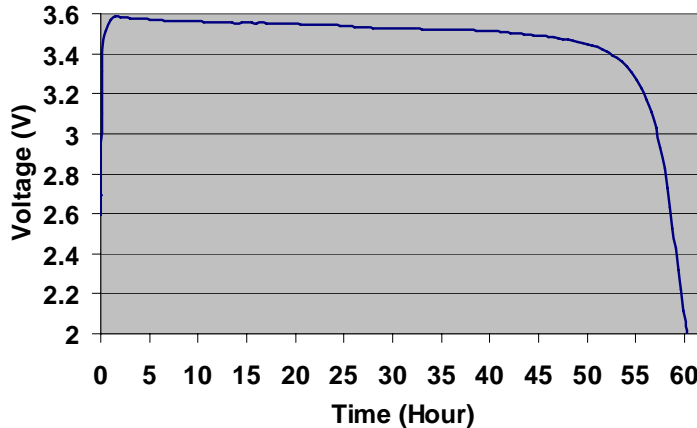

**Primary  
High Energy  
Extreme High Temperature  
Moderate Rate  
Lithium Thionyl Chloride  
Custom Terminations**

## TECHNICAL DATA:

**Capacity:** 24.0 Ah

**Rated Current:** 400 mA

**Voltage:** 3.67 V (Open Circuit)

**Operating Temperature:** -40°F to +356°F (-40°C to +180°C)

**Physical Dimensions:** 5.0 inch (12.62cm) x 1.25 inches (3.18cm) diameter

**Weight:** 6.3 ounces (179 grams ±5 grams)

**Suitable Applications:** Measurement While Drilling (MWD), Logging While Drilling (LWD)  
Oil Well Instrumentation

**ENGINEERED POWER LP**  
**WHEN PERFORMANCE COUNTS**

#20, 3103 – 14th Ave N.E.  
Calgary, Alberta, T2A 7N6  
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

*Updated: March 20, 2009*